



April 27, 2022

Sunmodo Corp
14800 NE 65th St
Vancouver, WA 98682
TEL: (360) 844-0048

Attn.: Sunmodo Corp - Engineering Department

Re: Report # 2021-02963HG.01 – Sunmodo SMR100
Subject: Engineering Certification for the State of Massachusetts

PZSE, Inc. – Structural Engineers has provided engineering and span tables for the Sunmodo SMR100 Rail, as presented in PZSE Report # 2021-02963HG.01, "Sunmodo SMR100 Rail, Engineering Certification for Gable and Hip Roofs". All information, data, and analysis therein are based on, and comply with, the following building codes and typical specifications:

- Building Codes:
1. ASCE/SEI 7-10, Minimum Design Loads for Buildings and other Structures, by American Society of Civil Engineers
 2. Ninth Edition CMR 780
 3. 2015 International Building Code, by International Code Council, Inc.
 4. 2015 International Residential Code, by International Code Council, Inc.
 5. AC428, Acceptance Criteria for Modular Framing Systems Used to Support Photovoltaic (PV) Panels, November 1, 2012 by ICC-ES
 6. Aluminum Design Manual 2015, by The Aluminum Association, Inc.
 7. ANSI/AWC NDS-2015, National Design Specification for Wood Construction, by the American Wood Council

Design Criteria:


Risk Category II
Seismic Design Category = A - E
Exposure Category = B, C & D
Basic Wind Speed (ultimate) per ASCE 7-10 = 95 mph to 200 mph
Ground Snow Load = 0 to 90 (psf)

This letter certifies that the loading criteria and design basis for the Sunmodo SMR100 Rail Span Tables are in compliance with the above codes.

If you have any questions on the above, do not hesitate to call.

Prepared by:
PZSE, Inc. – Structural Engineers
Roseville, CA

DIGITALLY SIGNED

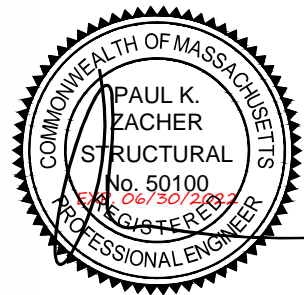



September 1, 2021

SunModo Corp
14800 NE 65th St
Vancouver, WA 98682
TEL: (360) 844-0048

Attn.: Sunmodo - Engineering Department

Re: Report #2021-02963HG.01 SunModo SMR100 Rail, Engineering Certification for Gable and Hip roofs.

PZSE, Inc. - Structural Engineers have reviewed SunModo SMR100 Rail. All information, data, and analysis contained within the SunModo SMR100 Rail span tables are based on and comply with the following codes:

1. Minimum Design Loads for Buildings and Other Structures, ASCE/SEI 7-10 & ASCE/SEI 7-16
2. 2012 - 2018 International Building Codes, by the International Code Council, Inc.
3. 2012 - 2018 International Residential Code, by the International Code Council, Inc.
4. AC428, Acceptance Criteria for Modular Framing Systems Used to Support Photovoltaic (PV) Panels, November 1, 2012, by ICC-ES
5. Aluminum Design Manual 2010 & 2015, by The Aluminum Association, Inc.
6. ANSI/AWC NDS-2012 & 2015, National Design Specification for Wood Construction, by the American Wood Council

Following are typical specifications to meet the above code requirements:

Design Criteria: Ground Snow Load = 0 - 90 (psf)
Basic Wind Speed = 90 - 190 (mph)
Roof Mean Height = 0 - 30 (ft)
Enclosed and Partially Enclosed Gable and Hip Roof Pitch = 0° - 90° (degrees)
Exposure Category = B, C & D

Cantilever: Maximum cantilever length is L/3, where "L" is the span noted in the Span Tables, provided there is at least 1 module length between maximum cantilevers.

Clearance: 2" Minimum clear and 10" Maximum clear from the top of the roof to top of PV panel.

Splice: Rails installed with (2) Roof Attachments (1 rail span)*: SMR100 Rail Splice where required shall be installed within a distance of $L/4$ from either Roof Attachment, where “L” is the rail span.

Rails installed with (3) or more Roof Attachments (2 or more rail spans)*: SMR100 Rail Splice where required shall not be installed within a distance of $L/8$ from any Roof Attachment, where “L” is the rail span.

*SMR100 Rail Splice may be installed on any portion of the span in instances where the rail is continuous over two roof attachments on both sides of the splice.

Tolerance(s): 1.0” tolerance for any specified dimension in this report is allowed for installation.

Installation Orientation: Landscape (L) - PV Panel long dimension is parallel to the ridge/eave line of roof, and the PV panel is mounted on the long side.
 Portrait (P) - PV Panel short dimension is parallel to the ridge/eave line of roof, and the PV panel is mounted on the short side.
 Rail Spacing Tables assume maximum panel dimensions are: 82” x 42”

Rail Materials: The SMR100 Rail Aluminum Alloys: 6005-T5, 6005A-T61, 6061-T6

Components and Cladding Roof Zones:

Roof Zones – Enclosed and Partially Enclosed Gable Roofs, $\theta \leq 7^\circ$:

The zones shall be determined using figure 30.3-2A of ASCE 7-16 (or figure 30.4-2A of ASCE 7-10). See Figure 1.

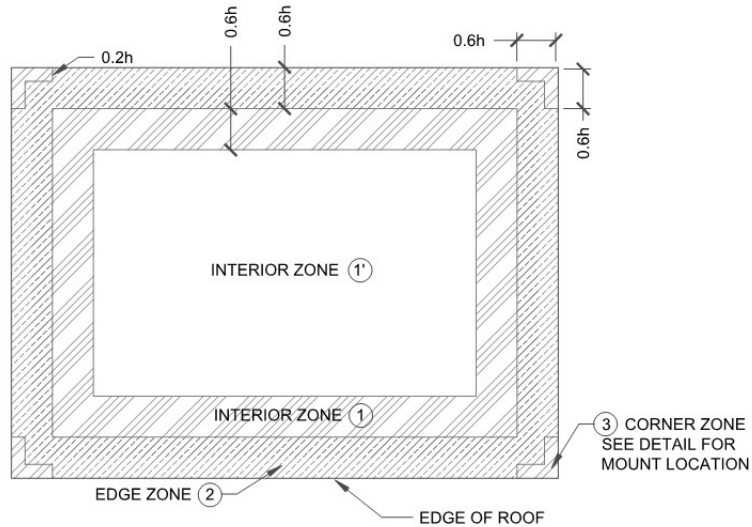


Figure 1: Roof Edge and Corner Zones, Gable Roofs, $\theta \leq 7^\circ$

Roof Zones – Enclosed and Partially Enclosed Gable and Hip Roofs, $7^\circ < \theta \leq 90^\circ$:

The Edge Zone, “a,” shall be determined using figure 30.3-2B to figure 30.3-2D of ASCE 7-16 (or figure 30.4-2A to figure 30.4-2A of ASCE 7-10), for Gable roofs. The Edge Zone, “a,” shall be determined using figure 30.3-2E to figure 30.3-2I of ASCE 7-16 (or figure 30.4-2B – figure 30.4-2C of ASCE 7-10), for Hip roofs. Roofs from $45^\circ < \theta \leq 90^\circ$ shall use the same Edge Zone, “a” determination as roofs from $27^\circ < \theta \leq 45^\circ$.

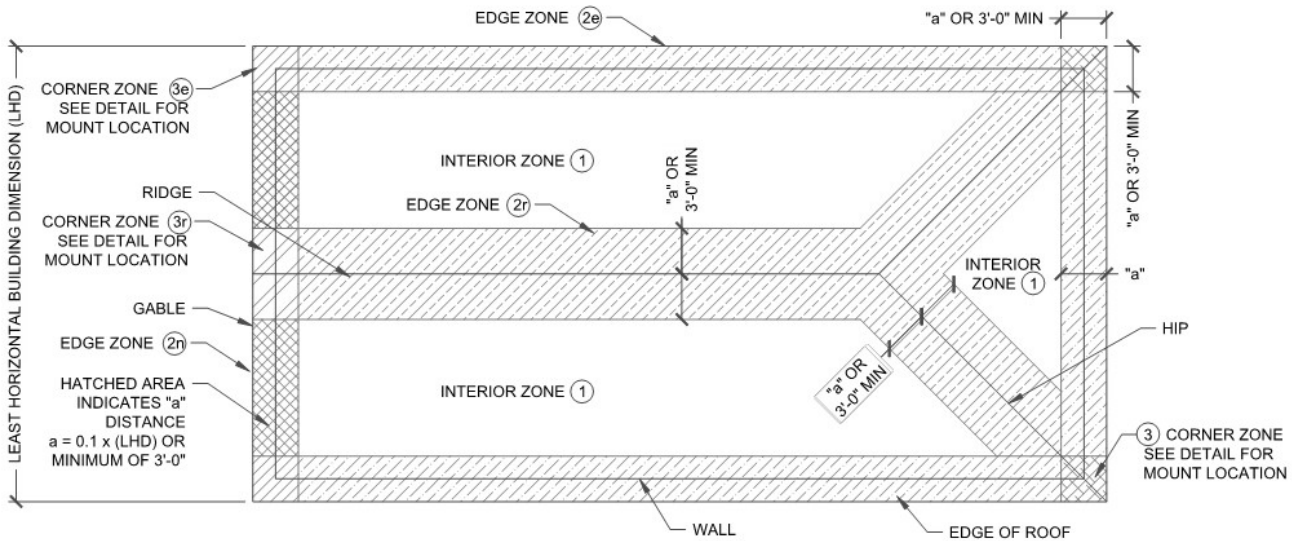


Figure 2: Roof Zones, Gable and Hip Roofs, $7^\circ < \theta \leq 90^\circ$

Panel with Support Mounts in Multiple Roof Zones:

Edge and Corner Zone spacings (Zone 2 & 3, respectively) apply only to mounts located in those Zones, not to all the mounts supporting the module.

- Notes:
- 1) Tables are determined for Rail only and do not include roof capacity check.
 - 2) Risk Category II per ASCE 7-10 & ASCE 7-16.
 - 3) Topographic factor, k_{zt} is 1.0.
 - 4) Average parapet height is 0.0 ft.
 - 5) Wind speeds are LRFD values.
 - 6) Attachment spacing(s) apply to a seismic design category E or less.



Design Responsibility:

These tables are intended to be used under the responsible charge of a registered design professional where required by the authority having jurisdiction. In all cases, these tables should be used under the direction of a design professional with sufficient structural engineering knowledge and experience to be able to:

- Evaluate whether these tables apply to the project, and
- Understand and determine the appropriate values for all input parameters of these tables.

This letter certifies that the SunModo SMR100 Rail, when installed according to the limitations of this letter and the attached span tables, complies with the above codes and loading criteria. This certification excludes evaluation of the building structure to support the loads imposed on the building by the array; including, but not limited to strength and deflection of structural framing members, fastening and/or strength of roofing materials, and/or the effects of snow accumulation on the roof. Structures will require additional knowledge of the building and are outside the scope of the certification of this racking system.

If you have any questions on the above, do not hesitate to call.

Prepared by:
PZSE, Inc. – Structural Engineers
Roseville, CA



Table of Contents

Item	Page #
SunModo SMR200 Rail Flush-Mount System – Gable and Hip Roofs.....	
Span Tables – ASCE 7-10 Wind Design - Portrait	6
Span Tables – ASCE 7-16 Wind Design - Portrait	9
Span Tables – ASCE 7-10 Wind Design - Landscape.....	19
Span Tables – ASCE 7-16 Wind Design - Landscape.....	22

Maximum Rail Spans (Inches)			SMR100 Rail Flush-Mount on 0 to 30 Foot Roof -- ASCE 7-16 -- 72-Cell (P)																																																																																
Ground Snow Load	Exposure Category	Panel Angle	Wind Speed ->																																																																																
			130 mph												140 mph												150 mph												160 mph												170 mph												180 mph												190 mph								
0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90	0 to 7	7 to 15	15 to 20	20 to 27	27 to 45	45 to 90																																				
15 psf	B	0 to 7	Array Interior	78	78	74	74	62	62	78	78	68	68	57	57	78	74	63	63	53	53	78	69	59	59	50	50	78	65	55	55	47	47	78	61	52	52	44	44	78	58	49	49	41	41																																						
		Array Edge	78	70	59	59	50	50	78	64	55	55	46	46	68	60	51	51	51	43	43	68	56	48	48	40	40	73	52	45	45	38	38	69	49	42	42	42	36	36	65	47	40	40	40	34	34																																				
		7 to 20	Array Interior	79	79	79	64	64	64	58	58	73	73	59	59	54	54	68	68	68	55	55	63	63	63	51	51	63	51	44	44	41	41	63	49	48	48	48	44	44	56	56	56	45	45	61	53	43	43	43	39																																
		Array Edge	64	64	64	51	51	51	47	47	59	59	59	48	48	48	48	44	44	51	43	43	51	41	41	41	38	38	48	39	39	39	35	35	45	45	45	45	37	37	33	43	43	43	35	35	35	32																																			
		20 to 27	Array Interior	85	85	70	70	70	67	67	83	83	83	65	65	65	62	62	71	71	71	67	67	67	67	67	54	54	67	56	56	56	46	46	69	49	49	49	49	49	49	49	49	49	49	49	49	41	41																																		
		Array Edge	74	74	74	57	57	57	54	54	69	69	69	52	52	52	52	64	64	64	49	49	49	49	49	49	59	59	59	46	46	46	36	36	56	36	36	36	36	36	36	36	36	36	36	36	38	38																																			
	C	7 to 20	Array Interior	82	82	82	82	78	78	77	77	77	72	72	72	71	71	71	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67																																	
		Array Edge	67	67	67	67	63	63	63	63	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62																																	
		27 to 45	Array Interior	82	82	82	82	78	78	77	77	77	72	72	72	71	71	71	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67	67																																
		Array Edge	67	67	67	67	63	63	63	63	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62	62																																
		45 to 90	Array Interior	93	93	89	89	89	89	89	89	89	89	84	84	84	84	84	86	86	86	80	80	80	80	80	80	74	74	86	75	75	75	75	75	79	79	71	71	71	71	71	76	76	67	67	67	67	71	71																																	
		Array Edge	83	83	83	76	76	76	76	76	79	79	79	70	70	70	70	74	74	74	65	65	65	65	65	65	69	69	61	61	61	61	61	65	65	57	57	57	57	57	61	61	54	54	54	54	54	58	58																																		

Maximum Rail Spans (Inches)				SMR100 Rail Flush-Mount on 0 to 30 Foot Roof -- ASCE 7-16 -- 72-Cell (P)																																											
Ground Snow Load	Exposure Category	Panel Angle	Wind Speed -> Roof Zone ->	90 mph						95 mph						100 mph						105 mph						110 mph						115 mph						120 mph							
				1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e
30 psf	B	0 to 7	Array Interior	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73		
		Array Edge	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73			
		7 to 20	Array Interior	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75		
		Array Edge	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75			
		20 to 27	Array Interior	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77		
		Array Edge	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77			
	C	27 to 45	Array Interior	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80		
		Array Edge	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80			
		45 to 90	Array Interior	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96		
		Array Edge	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96	96			
		0 to 7	Array Interior	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73		
		Array Edge	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73	73			
D	7 to 20	Array Interior	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75			
	Array Edge	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75	75				
	20 to 27	Array Interior	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77			
	Array Edge	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77	77				
	27 to 45	Array Interior	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80			
	Array Edge	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80	80				

Maximum Rail Spans (Inches)			SMR100 Rail Flush-Mount on 0 to 30 Foot Roof -- ASCE 7-16 -- 72-Cell (P)																																																																																					
Ground Snow Load	Exposure Category	Panel Angle	Wind Speed ->		130 mph												140 mph												150 mph												160 mph												170 mph												180 mph												190 mph											
			Roof Zone ->	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r																																					
30 psf	B	0 to 7	Array Interior	73	73	73	73	73	62	62	73	73	68	68	68	57	57	73	73	63	63	63	53	53	73	69	59	59	59	50	50	73	65	55	55	55	47	47	73	61	52	52	52	44	44	73	58	49	49	49	41	41																																				
		Array Edge	75	70	59	59	50	50	73	64	55	55	55	46	46	73	60	51	51	51	43	43	73	56	48	48	48	40	40	73	52	45	45	45	38	38	69	49	42	42	42	36	36	65	47	40	40	40	34	34																																						
		7 to 20	Array Interior	75	75	64	64	64	58	58	73	73	59	59	59	54	54	68	68	68	68	55	55	55	63	63	63	63	51	51	51	59	59	48	48	48	44	44	56	56	56	56	45	45	45	61	53	53	53	43	43	43																																				
		Array Edge	64	64	64	51	51	51	47	47	59	59	59	48	48	48	44	44	55	55	55	44	44	44	44	51	51	51	41	41	41	41	48	48	48	39	39	39	35	45	45	45	45	37	37	37	43	43	43	35	35	35	32																																			
		20 to 27	Array Interior	77	77	77	70	70	70	67	67	77	77	77	65	65	65	62	74	74	74	60	60	60	58	74	74	74	56	56	56	54	69	69	69	53	53	53	51	65	65	65	50	50	50	48	61	61	61	47	47	47	47																																			
		Array Edge	74	74	74	57	57	57	54	54	69	69	69	52	52	52	50	64	64	64	49	49	49	47	59	59	59	46	46	46	44	56	56	56	43	43	43	41	53	53	53	40	40	40	39	50	50	50	38	38	38	37																																				
	C	27 to 45	Array Interior	80	80	80	78	78	78	77	77	77	77	77	72	72	72	71	71	71	67	67	67	67	67	67	63	63	63	62	62	62	62	59	59	62	62	62	59	59	59	62	62	62	59	59	59	62	62	62	59	59	59																																			
		Array Edge	67	67	67	63	63	63	63	62	62	62	62	62	59	59	59	86	86	86	80	80	80	80	82	82	82	75	75	75	75	79	79	71	71	71	71	76	76	67	67	67	67	71	71	63	63	63	63																																							
		45 to 90	Array Interior	83	83	83	76	76	76	76	76	79	79	79	70	70	70	74	74	74	65	65	65	65	69	69	61	61	61	61	65	65	57	57	57	57	61	61	54	54	54	54	58	58	51	51	51	51																																								
		Array Edge	73	73	73	61	61	61	52	52	73	67	57	57	57	48	48	73	62	53	53	53	44	44	73	58	49	49	49	42	42	73	54	46	46	46	39	39	72	72	64	64	64	64	68	68	61	61	61	61																																						
		7 to 20	Array Interior	66	66	66	53	53	53	53	53	61	61	61	49	49	49	57	57	57	46	46	46	46	53	53	53	43	43	43	50	50	50	40	40	40	47	47	47	38	38	38	45	45	45	45	45																																									
		Array Edge	55	53	53	43	43	43	43	43	49	49	49	40	40	40	46	46	46	37	37	37	37	43	43	43	35	35	35	40	40	40	33	33	33	38	38	38	31	31	31	28	36	36	29	29	29																																									
	D	20 to 27	Array Interior	77	77	77	59	59	59	56	56	71	71	71	54	54	54	66	66	66	50	50	50	62	62	62	47	47	47	58	58	58	44	44	44	55	55	55	42	42	42	52	52	52	40	40	40																																									
		Array Edge	62	62	62	47	47	47	46	46	57	57	57	44	44	44	53	53	53	41	41	41	41	50	50	50	38	38	37	47	47	47	36	36	35	44	44	44	34	34	34																																															
		27 to 45	Array Interior	69	69	69	69	66	66	66	66	64	64	64	61	61	61	60	60	60	60	57	57	57	56	56	56	53	53	53	52	52	52	50	50	50	49	49	49	47	47	47																																														
		Array Edge	56	56	56	53	53	53	53	53	52	52	52	49	49	49	48	48	48	48	46	46	46	45	45	45	43	43	43	42	42	42	40	40	40	40	40	40	38	38	38																																															
		45 to 90	Array Interior	84	84	79	79	79	79	79	81	81	73	73	73	73	77	77	68	68	68	68	72	72	63	63	63	63	67	67	59	59	59	59	63	63	56	56	56	56																																																
		Array Edge	72	72	64	64	64	64	64	67	67	59	59	59	59	62	62	55	55	55	55	58	58	51	51	51	51	55	55	48	48	48	48	51	51	45	45	45	45																																																	

Ground Snow Load		Exposure Category		Panel Angle		Wind Speed ->																																																																																												
0 to 7		7 to 20		20 to 27		27 to 45		45 to 90		90 mph				95 mph				100 mph				105 mph				110 mph				115 mph				120 mph																																																																
1' 1 2e 2r 2n 3e 3r		1' 1 2e 2r 2n 3e 3r		1' 1 2e 2r 2n 3e 3r		1' 1 2e 2r 2n 3e 3r		1' 1 2e 2r 2n 3e 3r		1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r				1' 1 2e 2r 2n 3e 3r																																								
0 to 7		7 to 20		20 to 27		27 to 45		45 to 90		0 to 7				7 to 20				20 to 27				27 to 45				45 to 90				0 to 7				7 to 20				20 to 27				27 to 45				45 to 90				0 to 7				7 to 20				20 to 27				27 to 45				45 to 90				0 to 7				7 to 20				20 to 27				27 to 45				45 to 90												
0 psf		B	0 to 7	Array Interior	116	116	116	116	116	104	104	116	116	116	113	113	113	100	100	116	116	109	98	98	87	87	116	105	94	94	84	84	116	101	91	91	81	81	116	114	102	102	90	90	116	110	98	98	88	87	87	116	109	88	88	78	78	116	95	85	85	85	74	74	116	92	92	92	82	82	116	110	98	98	88	87	87	116	110	98	98	88	87	87	116	110	98	98	88	87	87	116	110	98	98	88	87	87
				Array Edge	116	114	102	102	90	90	116	109	98	98	87	87	116	105	94	94	84	84	116	101	91	91	81	81	116	114	102	102	90	90	116	110	98	98	88	87	87	116	110	98	98	88	87	87	116	109	88	88	78	78	116	95	85	85	85	74	74	116	92	92	92	82	82	116	110	98	98	88	87	87	116	110	98	98	88	87	87																	
0 psf		C	7 to 20	Array Interior	116	116	116	116	116	107	107	116	116	116	113	113	113	100	100	116	116	115	115	115	105	105	116	115	115	115	115	115	116	111	111	111	111	111	116	114	102	102	90	90	116	110	98	98	88	87	87	116	109	88	88	78	78	116	95	85	85	85	74	74	116	92	92	92	82	82	116	110	98	98	88	87	87	116	110	98	98	88	87	87	116	110	98	98	88	87	87							
				Array Edge	116	114	102	102	90	90	116	109	98	98	87	87	116	105	94	94	84	84	116	101	91	91	81	81	116	114	102	102	90	90	116	110	98	98	88	87	87	116	110	98	98	88	87	87	116	109	88	88	78	78	116	95	85	85	85	74	74	116	92	92	92	82	82	116	110	98	98	88	87	87	116	110	98	98	88	87	87																	

Table with columns for Maximum Rail Spans (Inches), Exposure Category, Panel Angle, Wind Speed (90, 95, 100, 105, 110, 115 mph), and Ground Snow Load. It provides data for various wind directions and speeds across different exposure and load conditions.

Maximum Rail Spans (Inches)				SMR100 Rail Flush-Mount on 0 to 30 Foot Roof -- ASCE 7-16 -- 72-Cell (L)																																																									
Ground Snow Load	Exposure Category	Panel Angle	Wind Speed -> Roof Zone ->	130 mph						140 mph						150 mph						160 mph						170 mph						180 mph						190 mph																					
				1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r	1'	2e	2r	2n	3e	3r																
30 psf	B	0 to 7	Array Interior	91	91	90	90	90	80	80	91	91	86	86	86	74	74	91	91	81	81	81	69	69	91	87	77	77	77	65	65	91	83	72	72	72	61	61	91	80	68	68	68	57	57	91	75	64	64	64	54	54									
			Array Edge	91	87	77	77	77	65	65	91	82	72	72	72	60	60	91	78	67	67	67	56	56	91	73	62	62	62	53	53	90	68	59	59	59	49	49	86	64	55	55	55	47	47	83	61	52	52	52	44	44									
		7 to 20	Array Interior	94	94	82	82	82	76	76	90	90	90	77	77	70	70	85	85	85	72	72	72	65	65	82	73	62	62	62	53	53	78	78	78	63	63	63	57	73	73	73	59	59	59	54	69	69	69	56	56	56	51								
			Array Edge	82	82	82	67	67	67	61	77	77	77	62	62	62	57	57	72	72	72	58	58	58	53	67	67	67	54	54	54	49	63	63	63	51	51	51	46	59	59	59	48	48	48	44	56	56	56	45	45	45	41								
		20 to 27	Array Interior	96	96	96	87	87	87	85	96	96	96	83	83	83	81	81	95	95	95	79	79	79	73	73	90	90	90	74	74	74	71	87	87	87	69	69	69	66	83	83	83	65	65	65	63	80	80	80	62	62	62	62	69	69	69	56	56	56	56
			Array Edge	91	91	91	74	74	74	71	86	86	86	68	68	68	66	66	82	82	82	64	64	64	61	78	78	78	60	60	60	57	73	73	73	56	56	56	54	69	69	69	53	53	53	51	65	65	65	50	50	50	48								
	C	45 to 90	Array Interior	112	112	106	106	106	106	107	107	101	101	101	101	101	103	103	96	96	96	96	96	96	99	99	92	92	92	92	92	95	95	88	88	88	88	88	92	92	85	85	85	85	85	89	89	81	81	81	81	81	81	81	81	67	67	67	67		
			Array Edge	99	99	92	92	92	92	92	95	95	87	87	87	87	87	91	91	83	83	83	83	83	87	87	80	80	80	80	80	83	83	75	75	75	75	75	80	80	71	71	71	71	71	76	76	67	67	67	67	67									
		0 to 7	Array Interior	91	89	80	80	80	67	67	91	84	74	74	74	62	62	91	80	69	69	69	58	58	91	76	65	65	65	54	54	91	71	61	61	61	51	51	89	67	57	57	57	48	48	85	63	54	54	54	46	46	81	51	44	44	44	37	37		
			Array Edge	91	76	65	65	65	55	55	91	70	60	60	60	51	51	87	65	56	56	56	47	47	83	61	52	52	52	44	44	80	57	49	49	49	42	42	75	54	46	46	46	39	39	71	51	44	44	44	37	37									
		7 to 20	Array Interior	84	84	84	70	70	70	63	80	80	80	65	65	65	59	59	74	74	74	60	60	60	55	69	69	69	56	56	56	51	65	65	65	53	53	53	48	61	61	61	50	50	50	45	58	58	47	47	47	47	43								
			Array Edge	70	70	70	57	57	57	51	65	65	65	52	52	52	48	48	60	60	60	49	49	49	44	56	56	56	46	46	46	42	53	53	53	43	43	43	39	50	50	50	40	40	40	37	47	47	47	38	38	38	35								
D	20 to 27	Array Interior	93	93	93	77	77	77	74	88	88	88	71	71	71	68	84	84	84	66	66	66	63	80	80	80	62	62	62	59	76	76	76	58	58	58	56	71	71	71	55	55	55	53	67	67	67	52	52	52	50										
		Array Edge	81	81	81	62	62	62	60	75	75	75	57	57	57	55	70	70	70	54	54	54	51	65	65	65	50	50	50	48	61	61	61	47	47	47	45	58	58	58	44	44	44	42	55	55	55	42	42	42	40										
	45 to 90	Array Interior	87	87	87	84	84	84	76	84	82	82	82	79	79	79	78	78	78	78	74	74	74	66	66	73	73	73	69	62	62	62	69	69	69	69	65	65	65	65	65	65	61	61	61	55	61	61	61	61	58	58	58								
		Array Edge	73	73	73	73	69	62	69	68	68	68	68	64	64	64	63	63	63	63	60	60	60	53	53	59	59	59	56	50	50	50	56	56	56	53	47	47	47	52	52	52	52	44	44	40	50	50	50	50	47	47	42								

Table with columns for Maximum Rail Spans (Inches), Exposure Category, Panel Angle, Roof Zone, Wind Speed (130-190 mph), and Ground Snow Load. Rows represent different span configurations and wind directions.

